

AC AXIAL FAN GENERAL DATA

FRAME: DIE-CAST ALUMINUM PAINTED BLACK OR NATURAL FINISH.
DIE-CAST ZINC PAINTED BLACK OR NATURAL FINISH.
PLASTIC PBT (UL 94V-0)

MOTOR: RELIABLE SHADED POLE MOTOR CONSTRUCTION.
CAPACITOR INDUCTION MOTOR

IMPELLER: INJECTION MOLDED, NON-FLAMMABLE THERMOPLASTIC UL 94V-0 RATING.
METAL

BEARING: PRECISION, LIFE LUBRICATED BALL BEARING SYSTEM.
PRECISION, OIL IMPREGNATED SINTERED SLEEVE BEARING SYSTEM.

INSULATION RESISTANCE: 10 MEGOHMS MINIMUM AT 500VDC.

DIELECTRIC STRENGTH: 1 MINIMUM AT 2,000 VAC/50-60Hz.

IMPEDANCE PROTECTION: THE FANS ARE DESIGNED IN SUCH A WAY THAT THE WIRING WILL NOT
BURN OUT EVEN IF THE ROTATING PARTS ARE RESTRICTED.
THE USE OF INCOMBUSTIBLE INSULATING MATERIALS ASSURES
INCREASED SAFETY.

OPERATING TEMPERATURE: -10°C TO +70°C FOR THE SLEEVE BEARING.
-20°C TO +80°C FOR THE BALL BEARING.

OPERATING VOLTAGE: 110/120V RANGE VOLTAGE FROM 85V TO 125V.
220/230V RANGE VOLTAGE FROM 190V TO 245V.

AMBIENT HUMIDITY: BALL BEARING RH20%-85%.
SLEEVE BEARING RH20%-80%.

NOISE LEVEL RANGE IS FROM 21 TO 54dBA DEPENDING ON THE SPEED AND MODEL SELECTED.


WARRANTY: COMMONWEALTH FANS ARE WARRANTED FREE OF CHARGE ON DEFECTIVE
MATERIALS AND WORKMANSHIP FOR ONE YEAR FROM THE DATE OF DELIVERY.

HIGHLIGHTING THE NEW PRODUCTS-AC AXIAL FAN

CAPACITOR MOTOR TYPE

EP-108EX-C


172x150x51mm

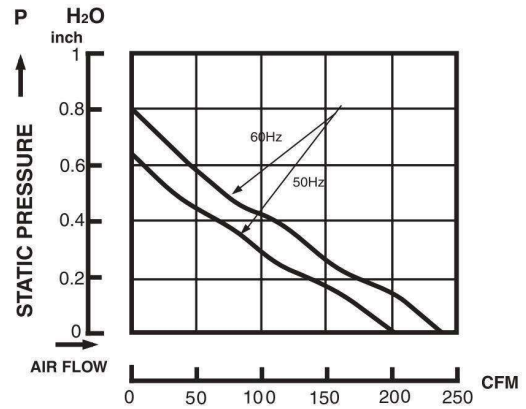

HIGH PERFORMANCE TYPE

FP-108K


220 x60mm

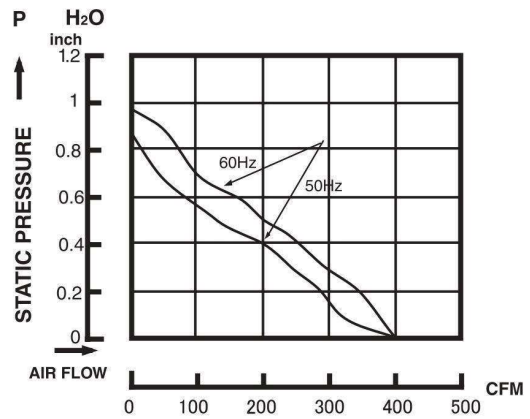

HIGH PERFORMANCE TYPE

FP-108HH

254 ϕ x89mm

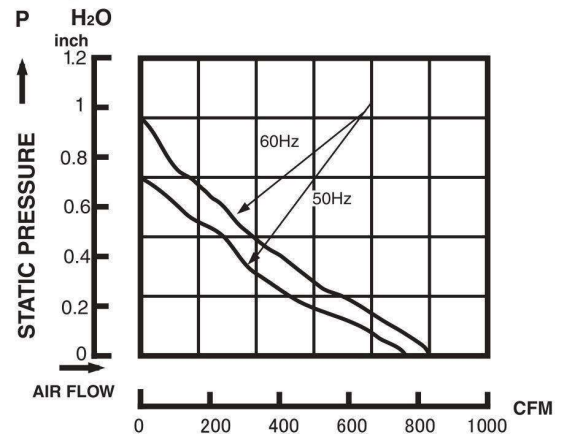


HIGHLIGHTING THE NEW PRODUCTS-AC AXIAL FAX

HIGH PERFORMANCE TYPE

FP-108ES-A


160x160x62mm

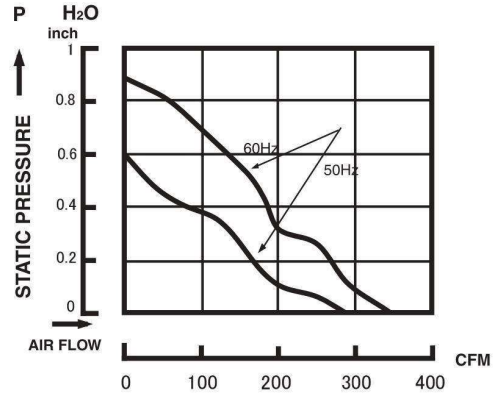

HIGH PERFORMANCE TYPE

FP-108ES-B


180x180x65mm

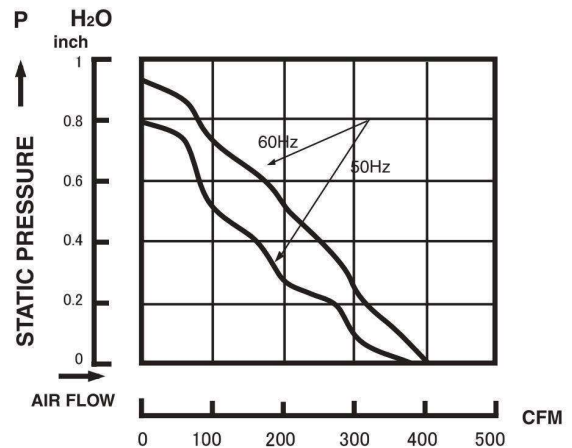

HIGH PERFORMANCE TYPE

FP-108ES-C

205x205x72mm

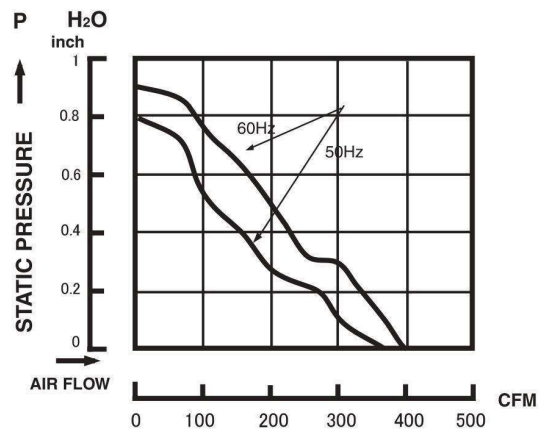

COMMONWEALTH AC AXIAL FAN

FP-108-1


119x119x38mm VENUS




DESIGN FEATURES

- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR PBT PLASTIC UL 94V-0
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: TERMINAL & WIRE LEADS
- *SPEED: S-U ULTRA TYPE
 - S-1 HIGH SPEED TYPE
 - S-2 MEDIUM SPEED TYPE
 - S-3 LOW SPEED TYPE
- *OTHER VOLTAGE: 24 ,48, 100, 380AC (50/60Hz) ARE AVAILABLE

DIMENSIONS:MM

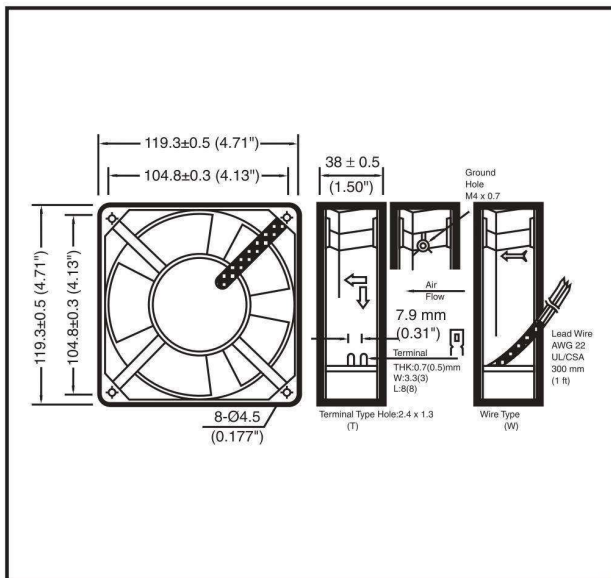

PERFORMANCE

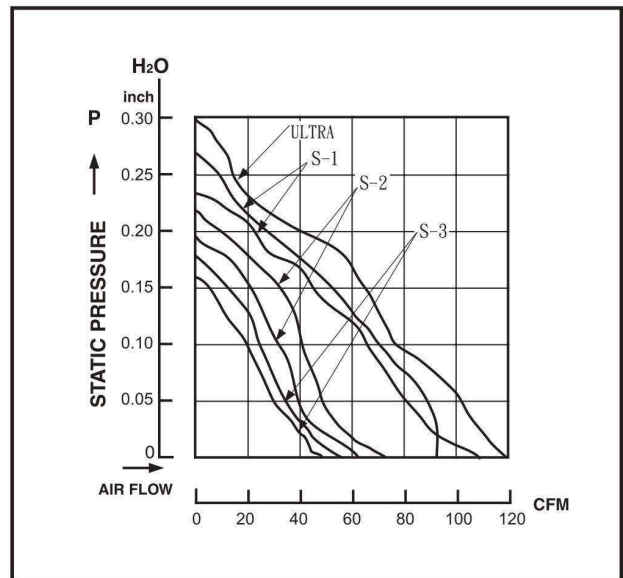

SPECIFICATIONS


Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
**NEW	110/120	50/60	112/120	3.18/3.40	0.25/0.19	18/19	2700/3000	0.27/0.30	40/45
FP-108-1 (S-ULTRA)	220/240	50/60	112/120	3.18/3.40	0.14/0.12	18/19	2700/3000	0.27/0.30	40/45
FP-108-1 (S-1)	110/120	50/60	80/105	2.30/3.00	0.24/0.18	18/17	2700/3000	0.23/0.28	42/47
FP-108-1 (S-1)	220/240	50/60	80/105	2.30/3.00	0.13/0.11	18/17	2700/3000	0.23/0.28	42/47
FP-108-1 (S-2)	110/120	50/60	63/71	1.65/1.85	0.13/0.12	11/10	2200/2500	0.19/0.21	37/39
FP-108-1 (S-2)	220/240	50/60	63/71	1.65/1.85	0.11/0.09	11/10	2200/2500	0.19/0.21	37/39
FP-108-1 (S-3)	110/120	50/60	54/52	1.50/1.40	0.11/0.10	9/8	1800/2000	0.16/0.15	30/34
FP-108-1 (S-3)	220/240	50/60	54/52	1.50/1.40	0.08/0.06	9/8	1800/2000	0.16/0.15	30/34

COMMONWEALTH AC AXIAL FAN

FP-108-7


127x127x38mm JUPITER

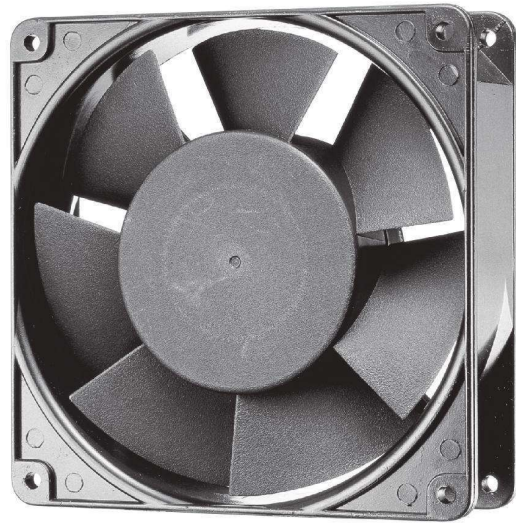


DESIGN FEATURES

- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: TERMINAL & WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE

DIMENSIONS:MM

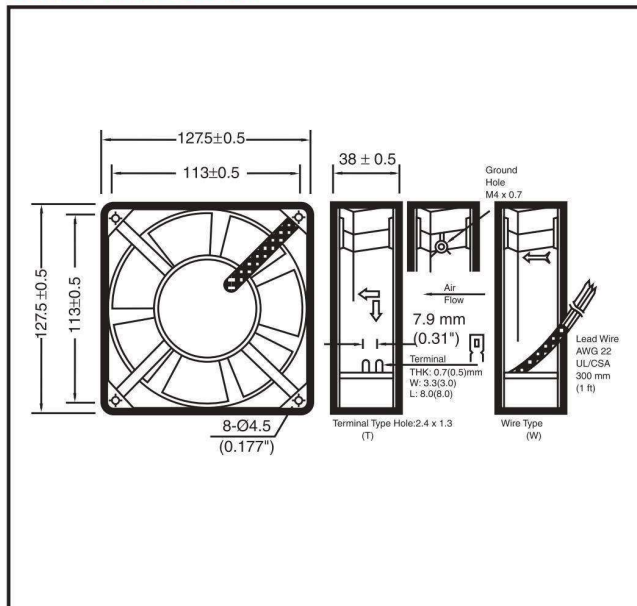

PERFORMANCE

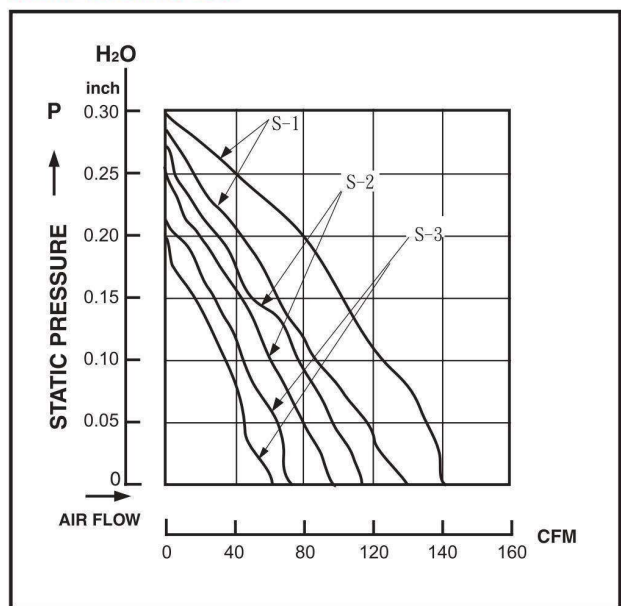

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108-7 (S-1)	110/120	50/60	115/140	3.30/4.00	0.26/0.24	24/23	2700/3000	0.28/0.30	44/47
FP-108-7 (S-1)	220/240	50/60	115/140	3.30/4.00	0.16/0.14	24/23	2700/3000	0.28/0.30	44/47
FP-108-7 (S-2)	110/120	50/60	85/105	2.40/3.00	0.16/0.14	20/19	2200/2500	0.26/0.27	39/40
FP-108-7 (S-2)	220/240	50/60	85/105	2.40/3.00	0.14/0.12	20/19	2200/2500	0.26/0.27	39/40
FP-108-7 (S-3)	110/120	50/60	72/80	2.00/2.30	0.14/0.12	14/12	1800/2100	0.20/0.21	32/36
FP-108-7 (S-3)	220/240	50/60	72/78	2.00/2.30	0.12/0.10	11/10	1800/2100	0.20/0.21	32/36

COMMONWEALTH AC AXIAL FAN

FP-108X


119x119x25.4mm MERCURY

DESIGN FEATURES


- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: TERMINAL & WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
- *OTHER VOLTAGE: 24 ,48, 100, 380AC (50/60Hz) ARE AVAILABLE



DIMENSIONS:MM

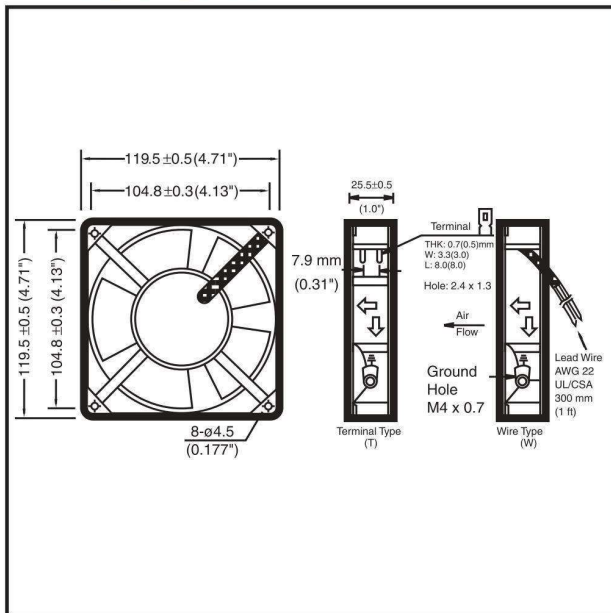

PERFORMANCE

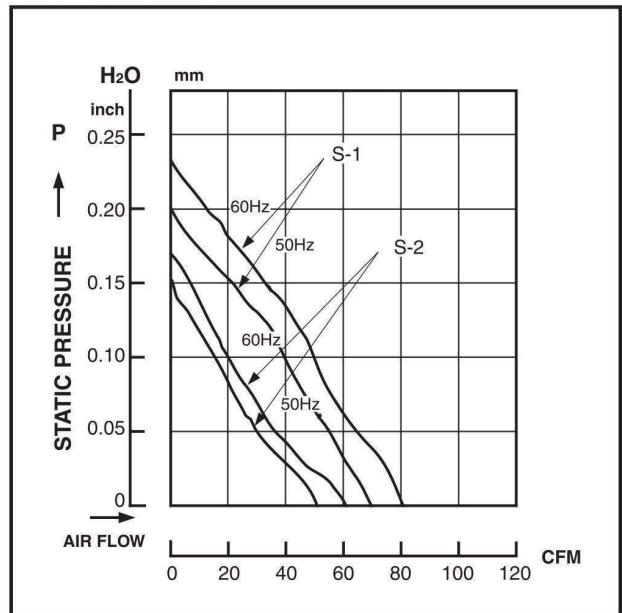

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108X (S-1)	110/120	50/60	64/80	1.8/2.3	0.19/0.18	18/16	2000/2350	0.20/0.23	42/44
FP-108X (S-1)	220/240	50/60	64/80	1.8/2.3	0.12/0.11	18/16	2000/2350	0.20/0.23	42/44
FP-108X (S-2)	110/120	50/60	57/60	1.6/1.7	0.13/0.11	13/12	1700/1900	0.16/0.18	34/37
FP-108X (S-2)	220/240	50/60	57/60	1.6/1.7	0.09/0.08	13/12	1700/1900	0.16/0.18	34/37

COMMONWEALTH AC AXIAL FAN

FP-108JC


92x92x38mm PLUTO




DESIGN FEATURES

- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE

DIMENSIONS:MM

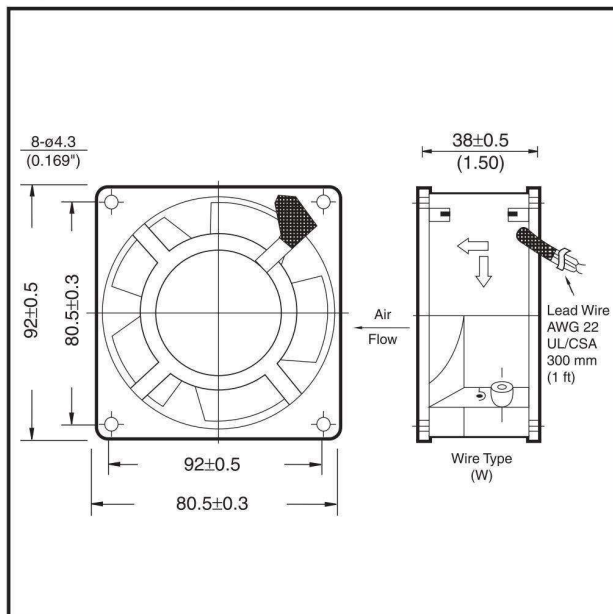

PERFORMANCE

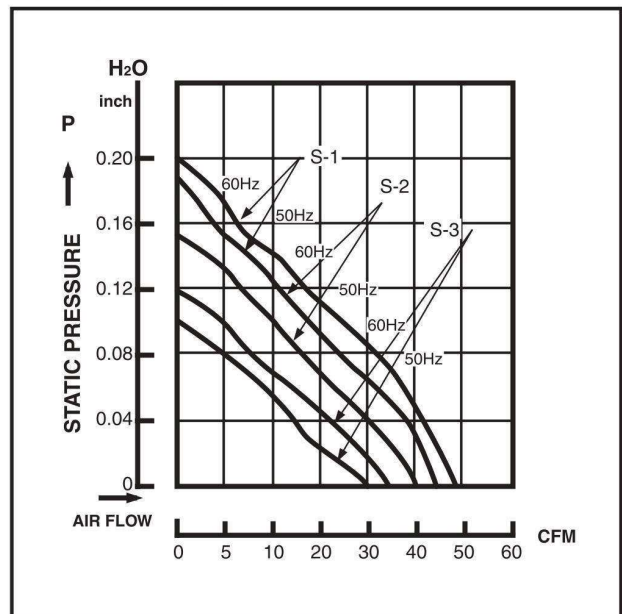

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108JC (S-1)	110/120	50/60	40/45	1.10/1.30	0.15/0.12	10/9	2700/3000	0.17/0.20	35/37
FP-108JC (S-1)	220/240	50/60	40/45	1.10/1.30	0.15/0.12	16/13	2700/3000	0.17/0.20	35/37
FP-108JC (S-2)	110/120	50/60	33/40	0.93/1.10	0.12/0.10	8.5/7.0	2300/2500	0.14/0.15	24/25
FP-108JC (S-2)	220/240	50/60	33/40	0.93/1.10	0.10/0.08	14/11	2300/2500	0.14/0.15	24/25
FP-108JC (S-3)	110/120	50/60	27/30	0.76/0.85	0.09/0.07	7.0/6.0	2000/2200	0.10/0.11	22/24
FP-108JC (S-3)	220/240	50/60	27/30	0.76/0.85	0.09/0.07	11/9.0	2000/2200	0.10/0.11	22/24

COMMONWEALTH AC AXIAL FAN

FP-108B


92x92x25.4mm BETA

DESIGN FEATURES


- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM & ZINC
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: TERMINAL & WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE



DIMENSIONS:MM

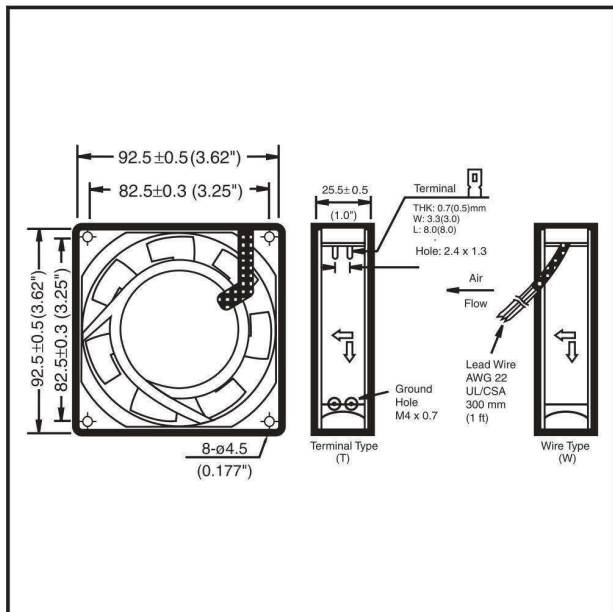

PERFORMANCE

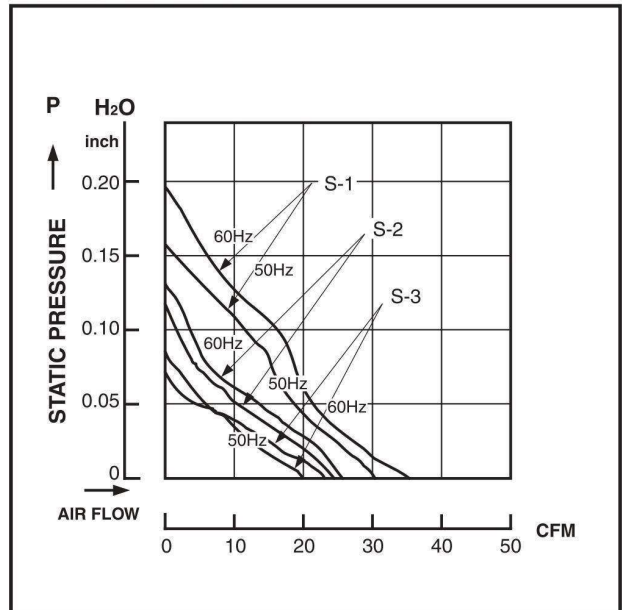

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108B (S-1)	110/120	50/60	30/36	0.85/1.00	0.21/0.20	19/17	2400/2800	0.16/0.20	35/37
FP-108B (S-1)	220/240	50/60	30/36	0.85/1.00	0.10/0.09	19/17	2400/2800	0.16/0.20	35/37
FP-108B (S-2)	110/120	50/60	25/28	0.71/0.77	0.07/0.06	12/10	2100/2400	0.13/0.14	28/30
FP-108B (S-2)	220/240	50/60	25/28	0.71/0.77	0.06/0.05	12/10	2100/2400	0.13/0.14	28/30
FP-108B (S-3)	110/120	50/60	21/22	0.62/0.60	0.06/0.05	8/6	1700/1900	0.10/0.09	22/24
FP-108B (S-3)	220/240	50/60	21/22	0.62/0.60	0.05/0.04	8/6	1700/1900	0.10/0.09	22/24


COMMONWEALTH AC AXIAL FAN

FP-108A


80x80x38mm ALPHA

DESIGN FEATURES


- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ZINC PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE

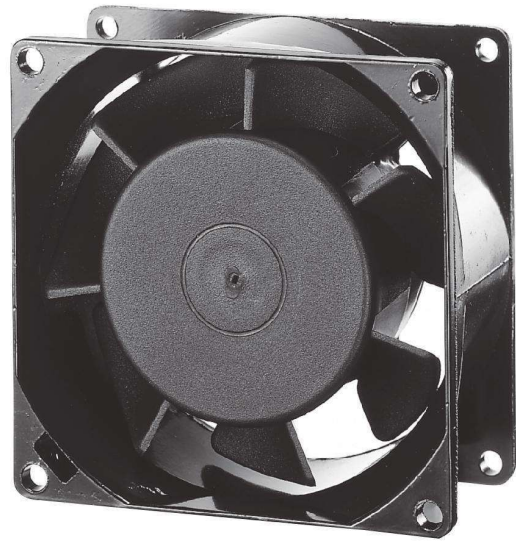

DIMENSIONS:MM

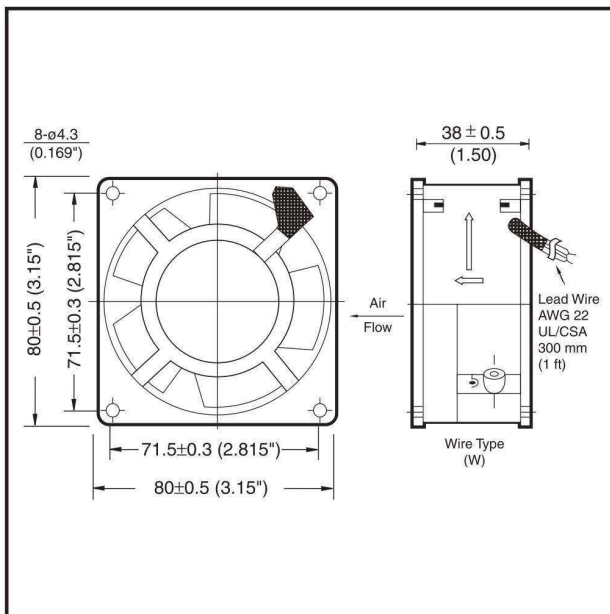

PERFORMANCE

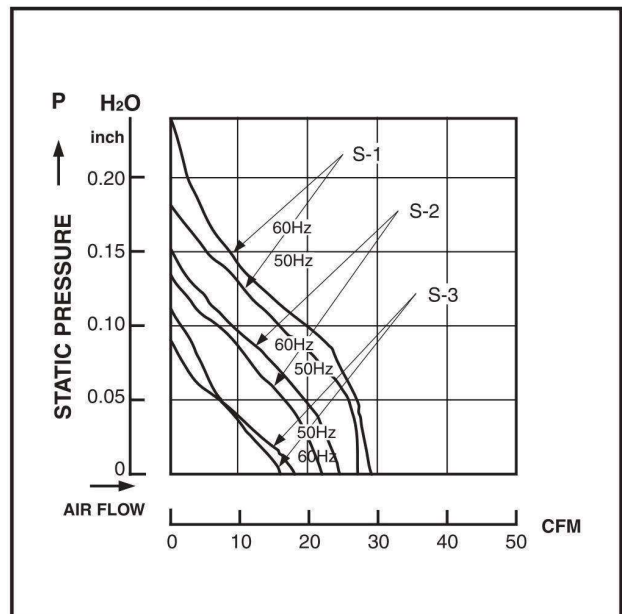

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108A (S-1)	110/120	50/60	26/30	0.74/0.88	0.14/0.12	13/12	2300/2700	0.17/0.24	30/35
FP-108A (S-1)	220/240	50/60	26/30	0.74/0.88	0.10/0.08	13/12	2300/2700	0.17/0.24	30/35
FP-108A (S-2)	110/120	50/60	21/23	0.14/0.15	0.12/0.10	10/9	2000/2300	0.14/0.15	24/27
FP-108A (S-2)	220/240	50/60	21/23	0.14/0.15	0.08/0.06	10/9	2000/2300	0.14/0.15	24/27
FP-108A (S-3)	110/120	50/60	17/16	0.50/0.47	0.08/0.06	6/5	1700/1900	0.12/0.10	21/23
FP-108A (S-3)	220/240	50/60	17/16	0.50/0.47	0.05/0.04	6/5	1700/1900	0.12/0.10	21/23

COMMONWEALTH AC AXIAL FAN

FP-108AX


80x80x25.4mm GAMMA

DESIGN FEATURES


- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM & ZINC
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE



DIMENSIONS:MM

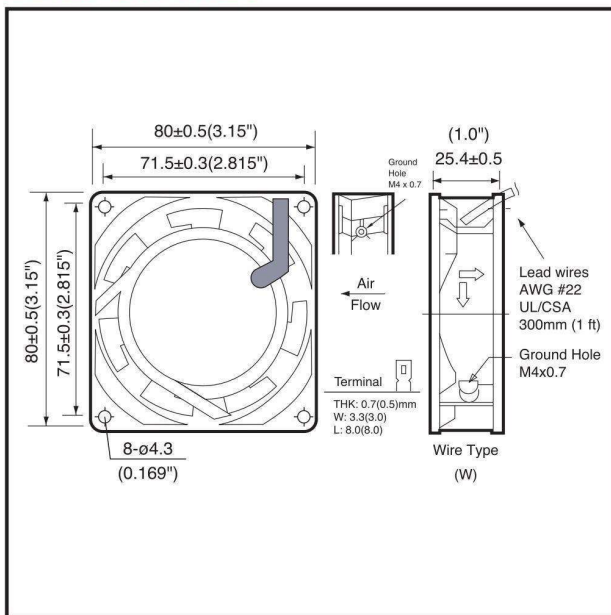

PERFORMANCE

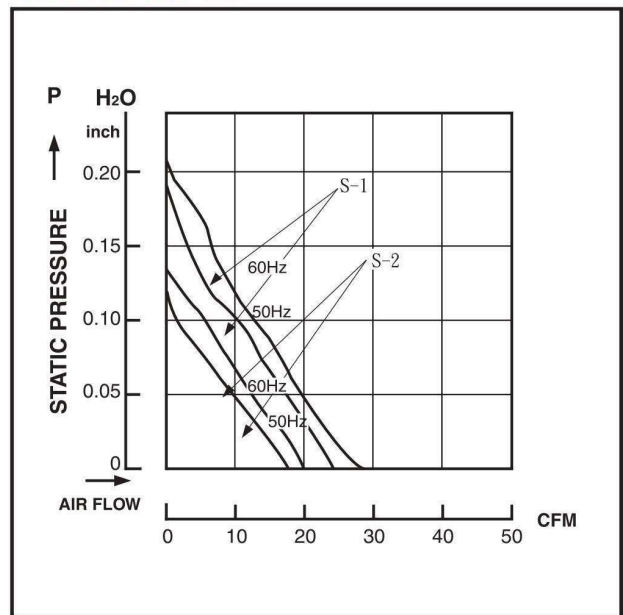

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108AX (S-1)	110/120	50/60	21/23	0.60/0.67	0.19/0.17	13/14	2400/2800	0.18/0.21	29/33
FP-108AX (S-1)	220/240	50/60	21/23	0.60/0.67	0.12/0.10	13/14	2400/2800	0.18/0.21	29/33
FP-108AX (S-2)	110/120	50/60	17/18	0.48/0.51	0.11/0.10	11/10	2100/2500	0.13/0.14	25/29
FP-108AX (S-2)	220/240	50/60	17/18	0.48/0.51	0.09/0.08	11/10	2100/2500	0.13/0.14	25/29

COMMONWEALTH AC AXIAL FAN

FP-108EX

172x150x51mm MARS

FP-108E


172Øx51mm

DESIGN FEATURES


- *BEARING SYSTEM: SLEEVE BEARING & BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: TERMINAL & WIRE LEADS
- *SPEED: S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE



DIMENSIONS:MM

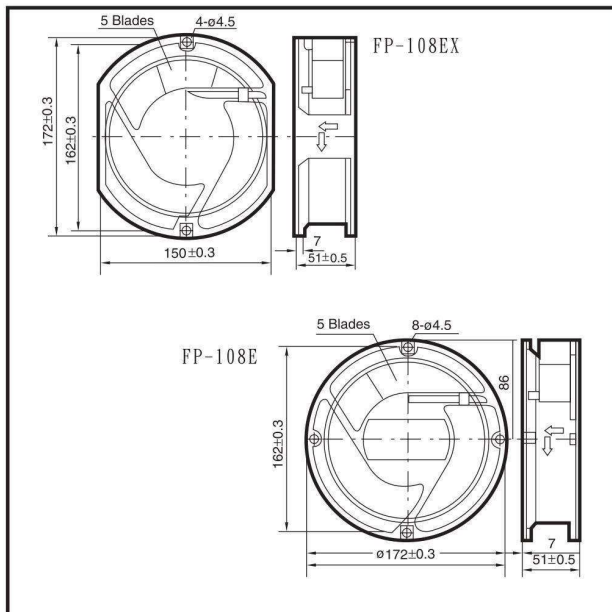

PERFORMANCE

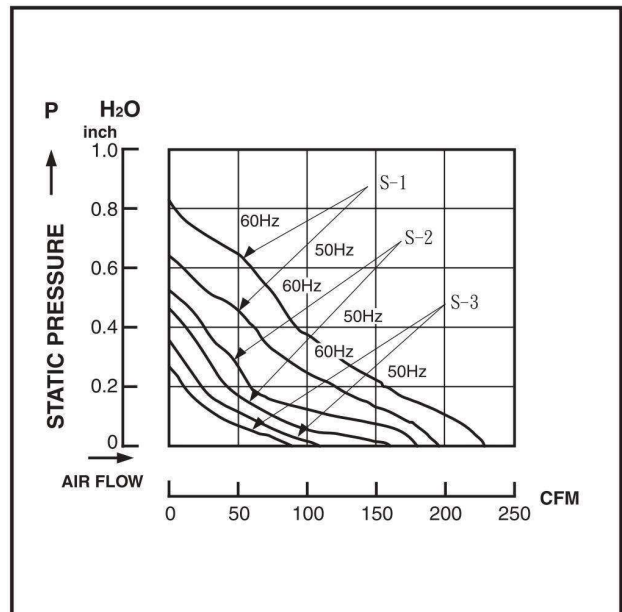

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108EX (S-1)	110/120	50/60	190/235	5.40/6.6	0.50/0.45	38/35	2800/3100	0.63/0.79	50/45
FP-108E (S-1)									
FP-108EX (S-1)	220/240	50/60	190/235	5.40/6.6	0.23/0.21	32/31	2800/3100	0.63/0.79	50/45
FP-108E (S-1)									
FP-108EX (S-2)	110/120	50/60	165/170	4.70/4.8	0.42/0.37	29/30	2300/2400	0.51/0.55	38/33
FP-108E (S-2)									
FP-108EX (S-2)	220/240	50/60	165/170	4.70/4.8	0.18/0.17	27/29	2300/2400	0.51/0.55	38/33
FP-108E (S-2)									
FP-108EX (S-3)	110/120	50/60	110/106	3.10/3.0	0.35/0.33	22/21	2100/1900	0.40/0.31	33/30
FP-108E (S-3)									
FP-108EX (S-3)	220/240	50/60	110/106	3.10/3.0	0.15/0.12	22/19	1900/1800	0.40/0.31	33/30
FP-108E (S-3)									

COMMONWEALTH AC AXIAL FAN

FP-108EXM


172x150x38mm




DESIGN FEATURES

- *BEARING SYSTEM: BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADE POLE MOTOR
- *PROTECTION: THERMAL PROTECTION & IMPEDANCE PROTECTION
- *CONNECTING: WIRE LEADS & TERMINAL
- *OTHER VOLTAGE: 24,48,100,380 V AC (50/60Hz) ARE AVAILABLE

DIMENSIONS:MM

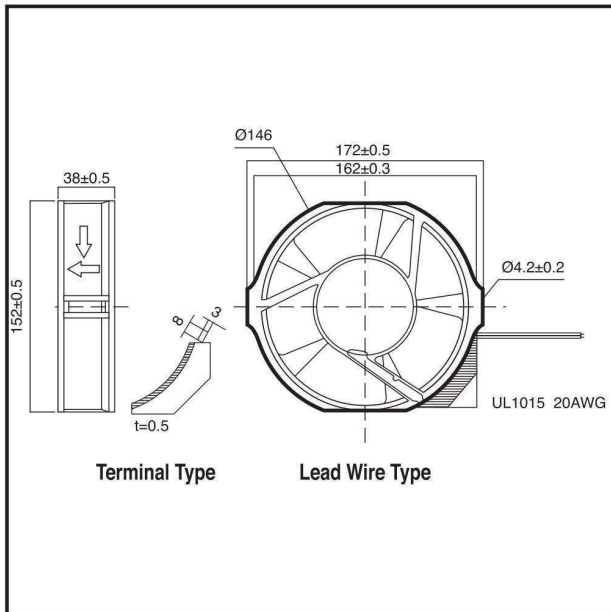

PERFORMANCE

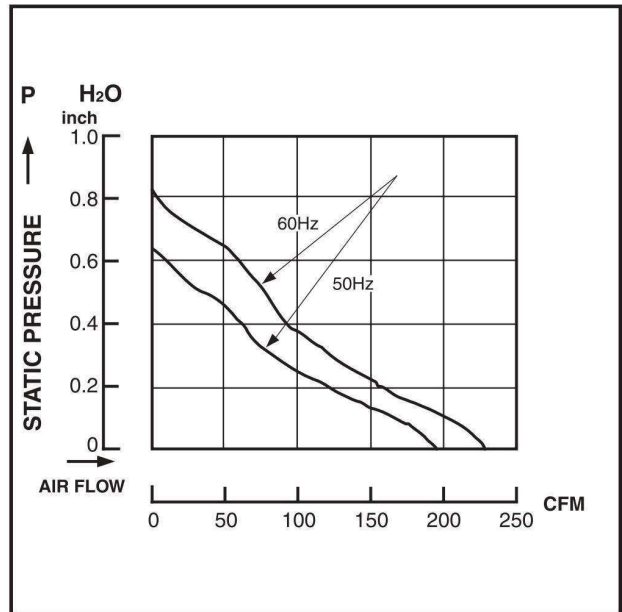

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108EXM	110/120	50/60	205/230	5.80/6.50	0.40/0.40	30/28	2700/2900	0.75/0.60	49
FP-108EXM	220/240	50/60	205/230	5.80/6.50	0.28/0.23	38/35	2700/2900	0.75/0.60	49

COMMONWEALTH AC AXIAL FAN

FP-108C

162x150x55mm

FP-108CX


162x150x38mm




DESIGN FEATURES

- *BEARING SYSTEM: BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0 & METAL
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: WIRE LEADS
- *OTHER VOLTAGE: 24, 48, 100, 380AC (50/60Hz) ARE AVAILABLE

DIMENSIONS:MM

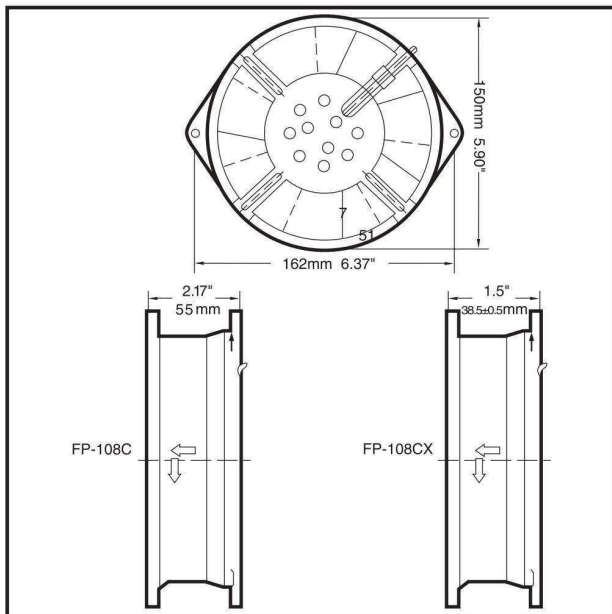

PERFORMANCE

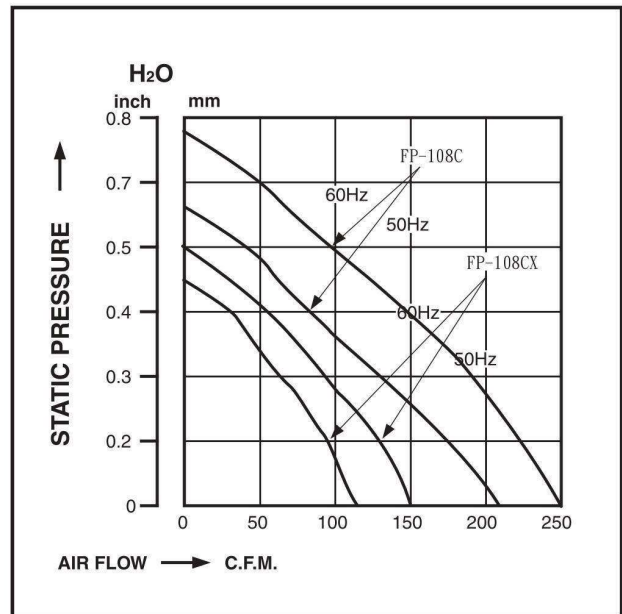

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108C	110/120	50/60	210/250	5.9/7.00	0.5/0.45	38/35	2700/3000	0.63/0.79	51/54
	220/240	50/60	210/250	5.9/7.00	0.5/0.45	32/31	2700/3000	0.63/0.79	51/54
FP-108CX	110/120	50/60	140/130	4.0/3.7	0.30/0.27	22/20	2300/2000	0.38/0.36	31/30
	220/240	50/60	140/130	4.0/3.7	0.18/0.16	27/24	2300/2000	0.38/0.36	31/30

COMMONWEALTH AC AXIAL FAN

FP-108K


220Øx60mm NEPTUNE

DESIGN FEATURES


- *BEARING SYSTEM: BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE-CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- *MOTOR: SHADED POLE, IMPEDANCE PROTECTED
- *CONNECTING: WIRE LEADS



DIMENSIONS:MM

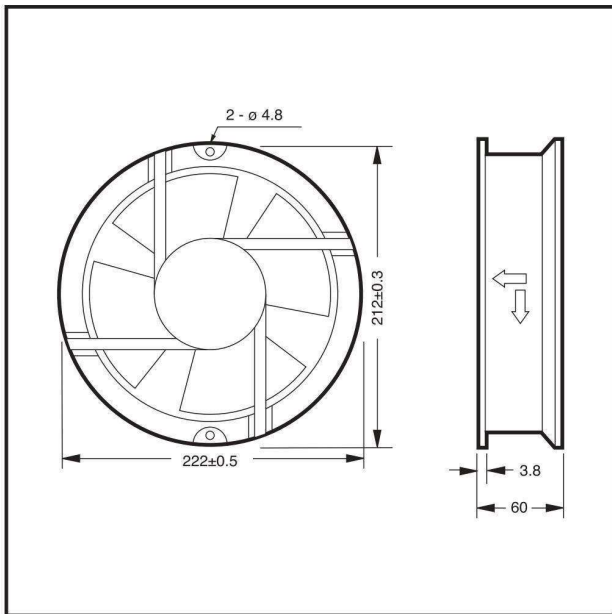

PERFORMANCE

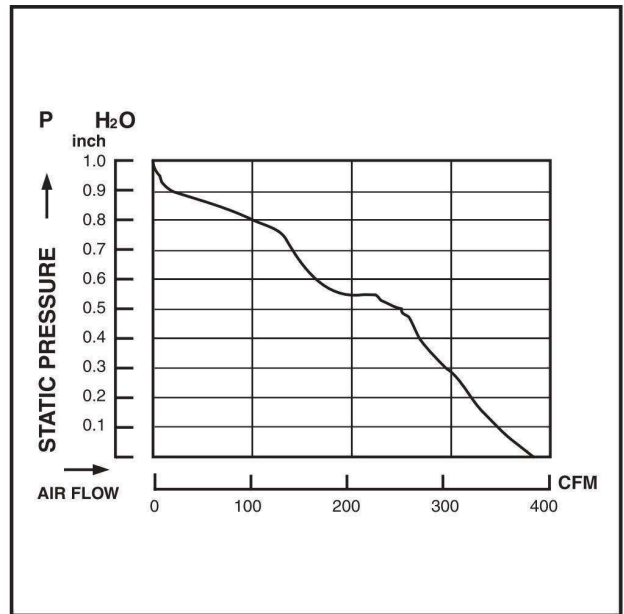

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108K	110/120	50	360	10.20	0.70	52	2400	0.9	56
FP-108K	220/240	50	360	10.20	0.30	44	2400	0.9	56

COMMONWEALTH AC AXIAL FAN



FP-108HH


254Øx89mm

DESIGN FEATURES


- *BEARING SYSTEM: BALL BEARING
- *IMPELLER: PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- *HOUSING: DIE CAST ALUMINUM PAINTED BLACK
- *MOTOR: CAPACITOR INDUCTION MOTOR
- *PROTECTION: THERMAL PROTECTION
- *CONNECTING: WIRE LEADS & TERMINAL
- *OTHER VOLTAGE: 100,200VAC(50/60Hz)ARE AVAILABLE



DIMENSIONS:MM

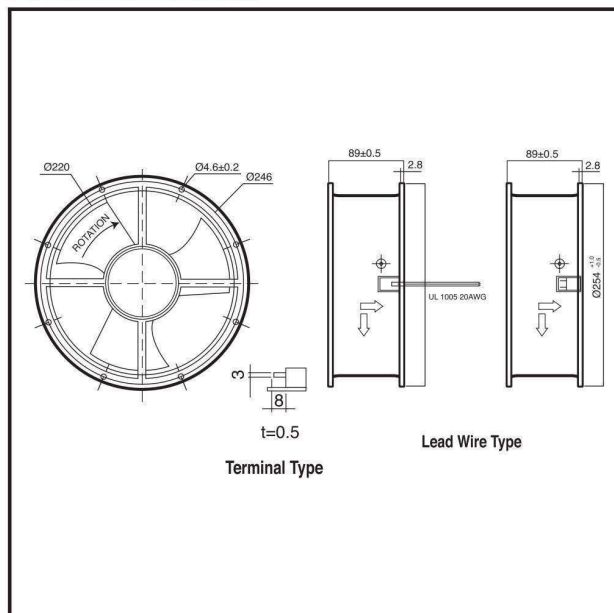

PERFORMANCE

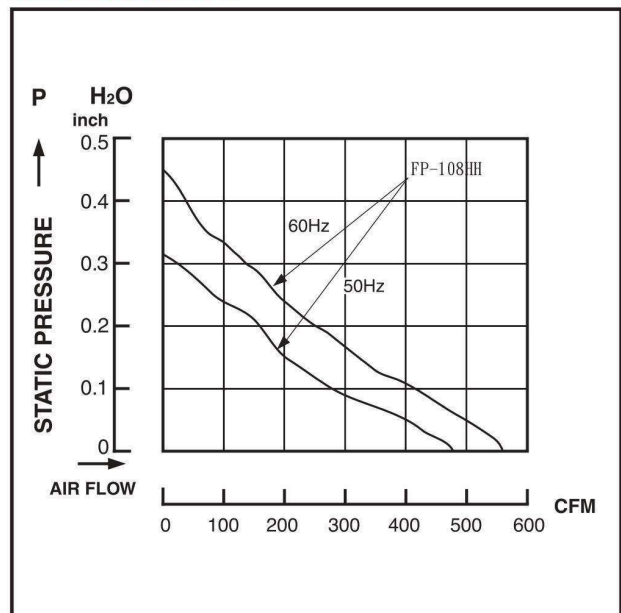

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLT (VAC)	FREQUENCY (HZ)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108HH	110/120	50/60	460/550	13.0/15.5	0.32/0.30	35/30	1500/1650	0.35/0.45	48
FP-108HH	220/240	50/60	460/550	13.0/15.5	0.15/0.14	33/31	1500/1650	0.35/0.45	48